


A150 (H or V) ALUMINUM

Single Deflection Diffuser

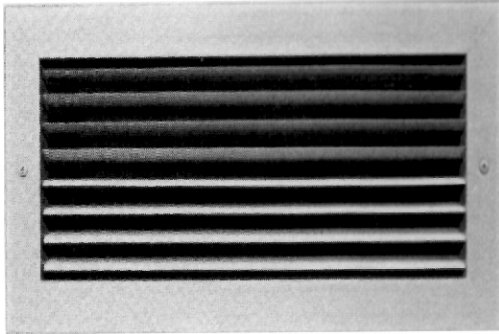

- All .055 T6 extruded aluminum surface mount diffuser.
- Nylon bushings for easy adjustment and quiet setting of airfoil blades.
- Foam gaskets.
- Countersunk mounting holes for flush appearances with color matching Phillips posidrive screws.
- Finish Standard: A Soft White
- Finishes Optional: B Driftwood Tan
- C *Colors (see page 1)
- F Satin Anodized

A150H Series






- Single deflection diffuser with adjustable horizontal airfoil blades.
- Airfoil blade is parallel to longest dimension.
- Allows 2way air deflection on one plane.
- With recessed screwdriver operated Opposed Blade Damper (A150H0).

A150V Series

- Single deflection diffuser with adjustable vertical airfoil blades.
- Airfoil blade is parallel to shortest dimension.
- Allows 2way air deflection on one plane.
- With recessed screwdriver operated Opposed Blade Damper (A150V0).

Optional:

- Drywall flange (A150HDW).
- Fractional, I.D. and O.D. sizes available.

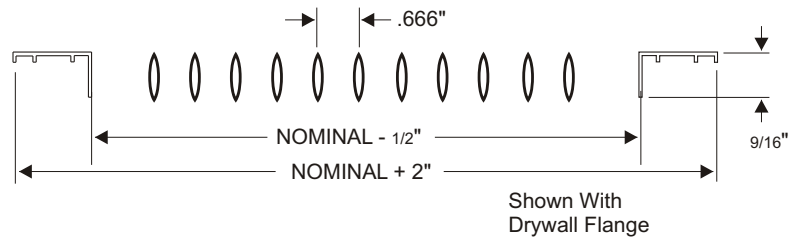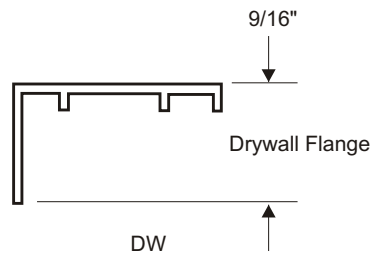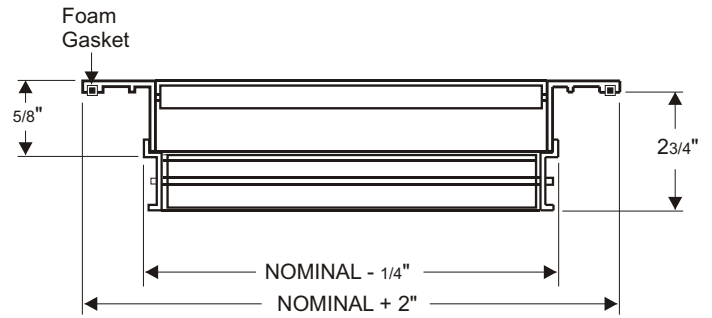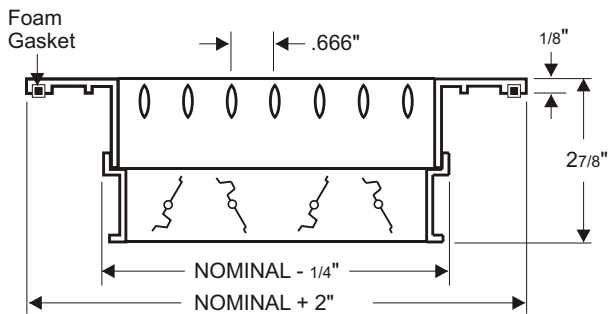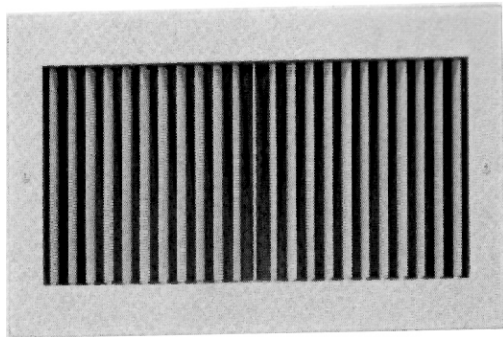

CUSTOMER ORDER NO. --		
JOB --		
ARCHITECT --		
CUSTOMER --		
QTY	ORDER SIZE (W x H)	TAG