


# S-44 OBD Parallel Blade

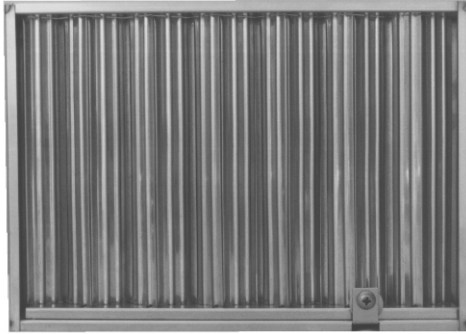

The series S-44 PBD is constructed from type 304 stainless steel. Type 316 stainless steel also available at an additional cost. Face operating mechanism is screwdriver controlled.

The S-44 PBD allows gang operation of blades for even directional control of air flow, and it can be mounted to any of our grille and diffuser products.

**Factory Standards**

- 20 ga. type 304 stainless, 2B finish.
- Fully adjustable, positive, air-flow damper.
- Screwdriver operating mechanism


**Factory Options** (extra charge)

- Remote access operator.
- Type 316 stainless.

Minimum W x H	Maximum W x H
4" x 4"	24" x 24"

**U.S. Units to Metric Conversion**

INCHES x (25.4) = MILLIMETERS

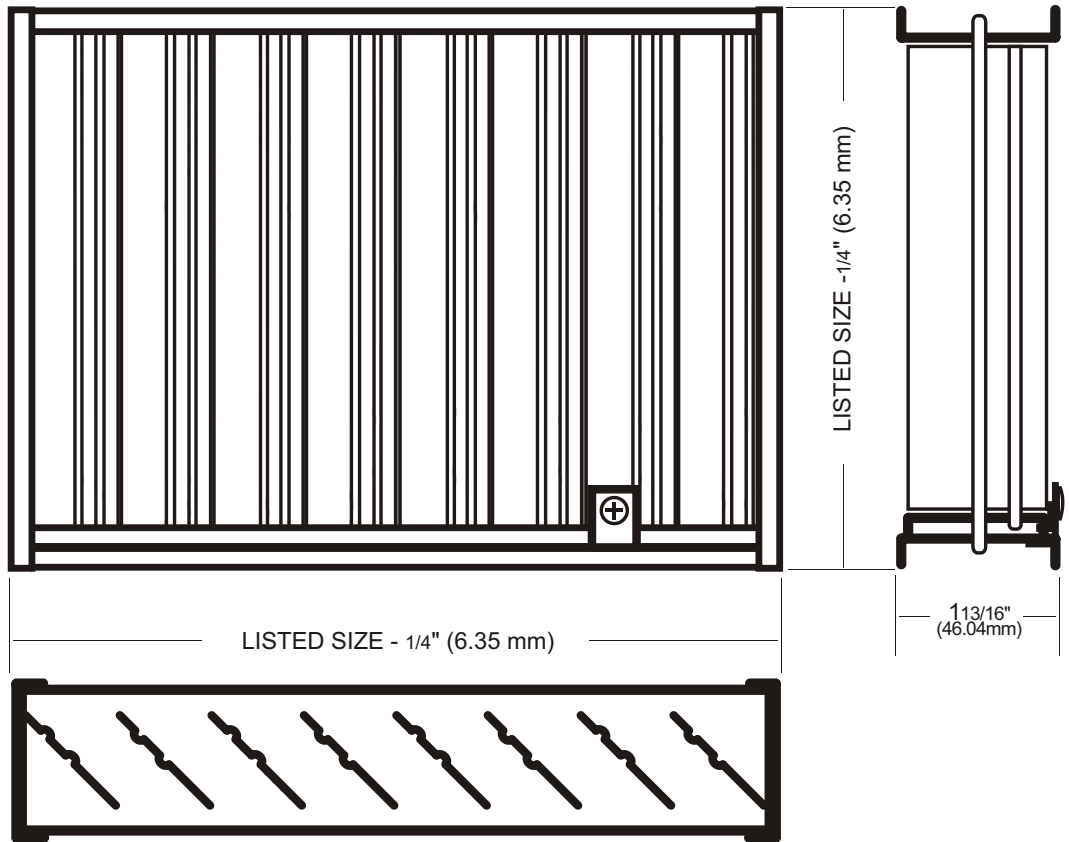

CUSTOMER ORDER NO. --			
JOB --			
ARCHITECT --			
CUSTOMER --			
QTY	ORDER SIZE (W x H)	TAG	304 OR 316